




Ultra Strip Drain for Field Built Sumps

Waterway Ultra Strip Drains for Field Built Sumps are compliant with the Virginia Graeme-Baker Pool and Spa Safety Act (ASME A112.19.8-2007 and ASME A112.19.8a-2008) and are NSF Certified. They are designed for single or multiple drain use. This strip drain assembly includes grate, plaster ring, cover, and stainless steel screws.


The Waterway 640-133x V series Ultra Strip Drain for Field Built Sumps is available in:

☐ White

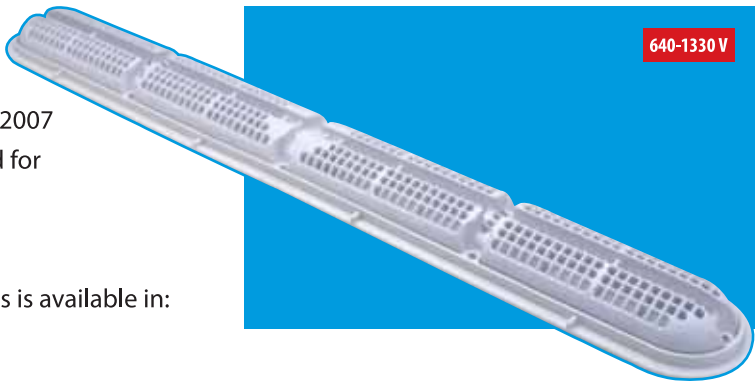

640-1330 V

Model No.	Description	Size	Total Open Area Square Inches	Floor Flow Rate GPM	Wall Flow Rate GPM	Flow Rate GPM @ 1.5 ft/sec
640-133x V	Ultra Strip Drain - Field Built	32"	37.7	288 @ 2.47 ft/sec (one port center)	232 @ 1.99 ft/sec (one port center)	175
640-133x V	Ultra Strip Drain - Field Built	32"	37.7	352 @ 3.02 ft/sec (two ports)	296 @ 2.61 ft/sec (two ports)	175

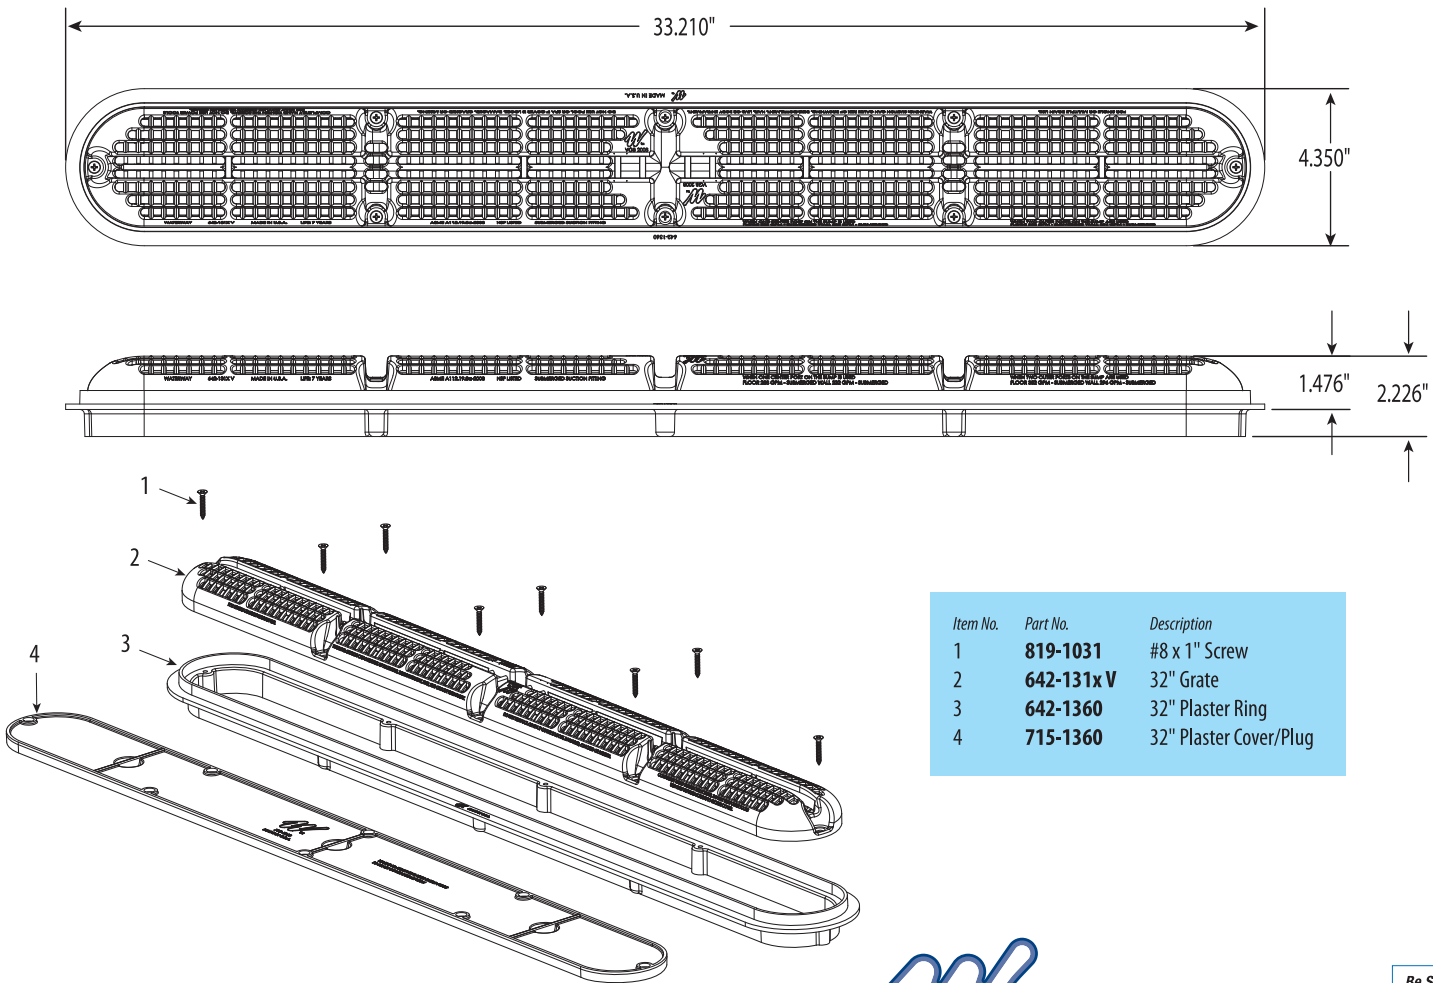

Item No.	Part No.	Description
1	819-1031	#8 x 1" Screw
2	642-131x V	32" Grate
3	642-1360	32" Plaster Ring
4	715-1360	32" Plaster Cover/Plug

