

SGMS Suction With Support Nut

No silicone • No spot facing • No alignment ring required




Scan QR Code for more info

Features:

- No more back facing or silicone required!
- Fast and easy to install
- Now with added support nut for greater weight & vibration reinforcement
- Works with uneven surfaces
- Available with all 5" suction

Specifications:

- Fits wall thicknesses from 3/16" to 7/16"
- 50 shore EPDM grommet
- 4 1/8" hole saw size

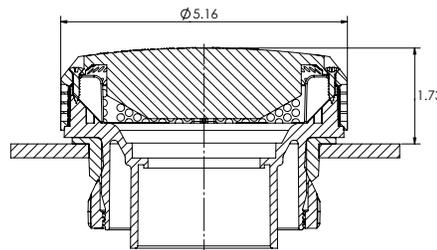

Fits all Waterway 5" SGMS suction (Super Hi-Flo, Ultra Super Hi-Flo and Designer suction), with more fittings coming soon! Ask your Waterway sales representative for available part numbers.

Disclaimer: It is the sole responsibility of the customer to identify and perform all tests and any analysis necessary to assure that its finished products incorporating Waterway's items will be safe, leakage-free and suitable for use under end-use conditions. Please ensure sufficient rigidity of spas shell to avoid hole distortion during drilling. 1/4" to 5/16" thick shell is recommended to prevent hole deformation. Frequently verify condition of hole saw and measure drilled holes for size and roundness. Dull/Damaged hole saws, oversized, undersized, out of round, chipped holes may cause water leakage or borderline sealing.