



Spa Drains & Suctions / Lo-Pro Suctions and Floor Drains



Low Profile Drain Assemblies

Part No.	Description	Case Quantity	List (US \$)
640-0400	¾" Socket / 1" Spigot	100	8.79
640-0420	Shur-Grip - ¾" SB	100	8.79
640-0401S	¾" Socket - Stainless Steel Cover	100	16.37
640-0430	Large Face - ½" S	100	12.31
711-0080	Grommet Gasket	1000	0.57



90° Ell Lo-Pro Spa Floor Drains

Part No.	Description	Case Quantity	List (US \$)
640-4340	¾" S Floor Drain	40	21.68
640-4400	1" S Floor Drain	40	21.68
640-4440	¾" SB Floor Drain	40	21.68



WARNING

Read and follow all instructions in the Owner's Manual for all equipment.
Failure to follow instructions can cause injury and/or death.

**VGB
2008**

All Waterway Drains, Grates and Suctions are Listed and Certified and Tested in strict accordance to the requirements of ASME A112.19.8-2007 and ASME A112.19.8a-2008 (as defined in CPSC letter dated April 8, 2011). Compliant to the latest Consumer Safety Product Commission Requirements (CPSC).



**VGB
2008**





640-3250 VP

FEATURES:

- New Hi-Flo rating of 128 GPM (without vacuum break)
- For portable spas
- Available in 1 1/2" S sizes

SPECIFICATIONS:

- Total Open Area: 4.01 sq. in.
- Floor Flow Rate: N/A
- Wall Flow Rate: 128 GPM

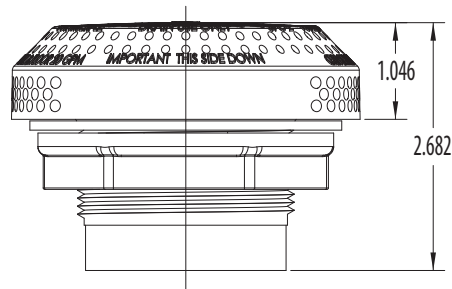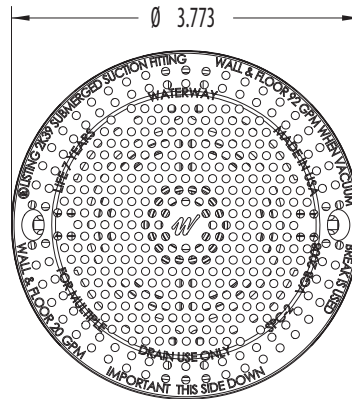

SPC-2 VP - 3.5" Hi-Flo Suctions

Part No.	Description	Case Quantity	List (US \$)
640-325x VP	Hi-Flo Suction Assembly - 1 1/2" Hex (without Vacuum Break)	80	18.78
640-328x VP	Hi-Flo Suction Assembly - 1 1/2" 90° Ell (without Vacuum Break)	80	23.10
640-348x VP	Hi-Flo Suction Assembly - 1 1/2" 90° Ell (with 642-4120 VAC Vacuum Break)	80	23.10



Spa Drains & Suctions / 3.5" Ultra Hi-Flo Suctions



Patent
Pending



VGB
2008



640-3497 VP

SPECIFICATIONS:

- Total Open Area: 6.24 sq. in.
- Floor Flow Rate: N/A
- Wall Flow Rate: 160 GPM
- For portable spas

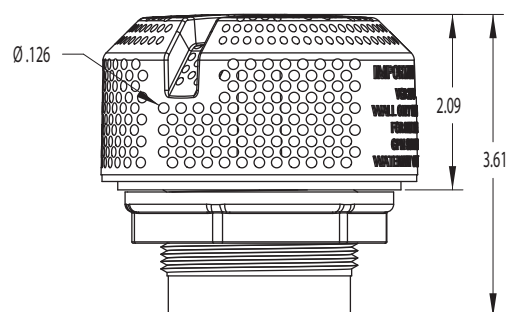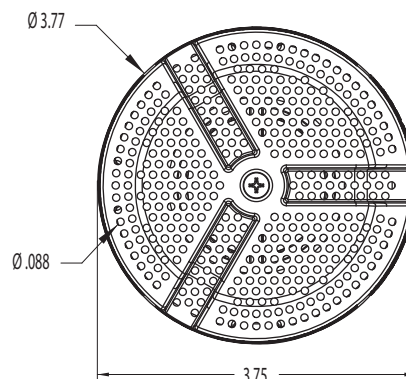

3.5" Ultra Hi-Flo Suctions

Part No.	Description	Case Quantity	List (US \$)
640-349x VP	3.5" Ultra Hi-Flo Suction - Tall Assembly	50	18.78

Replace the final x in the part number with the color of your choice (see page 4 for colors).





Patent # US D629,875 S

FEATURES:

- Flow Rate of 252 GPM (portable spas only)
- Available in 2" and 2 1/2" S sizes
- Two tone color for additional color coordination
- Available in Stainless Steel / color of your choice

VGB
2008

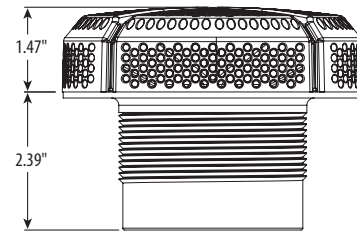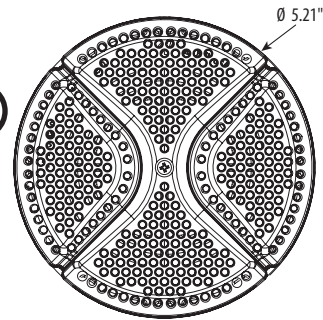

5" Designer Pro Series Suctions

Part No.	Description	Case Quantity	List (US \$)
640-520x V	5" Designer Pro Series Suction - 2" S - Two Tone	35	29.45
640-525x V	5" Designer Pro Series Suction - 2 1/2" S - Two Tone	35	29.45
640-530x V	5" Designer Pro Series Suction - 2" S - Two Tone Stainless Steel	35	41.67
640-535x V	5" Designer Pro Series Suction - 2 1/2" S - Two Tone Stainless Steel	35	41.67

Replace the final x in the part number with the color of your choice (see page 4 for colors).





640-3797 V

VGB
2008



SPECIFICATIONS:

- Total Open Area: 9.02 sq. in.

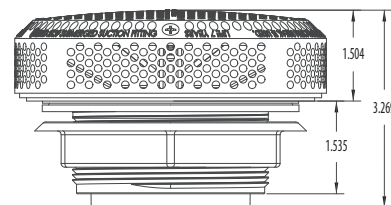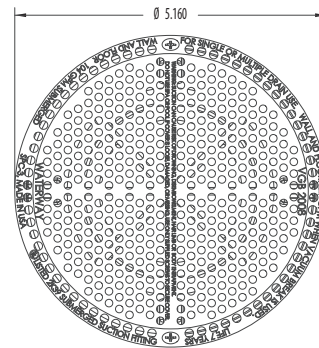


SPC-3 VP - 5" Super Hi-Flo Suctions

Part No.	Description	Case Quantity	List (US \$)
640-378x V	5" Super Hi-Flo Suction Assembly - 2" S	35	26.08
640-379x V	5" Super Hi-Flo Suction Assembly - 2 1/2" S	35	26.08
640-3570S V	5" Super Hi-Flo Suction Assembly - 2" S - Stainless Steel	35	38.30
640-3580S V	5" Super Hi-Flo Suction Assembly - 2 1/2" S - Stainless Steel	35	38.30

Replace the final x in the part number with the color of your choice (see page 4 for colors).





Spa Drains & Suctions / 5" Ultra Flo Suctions for Portable Spas

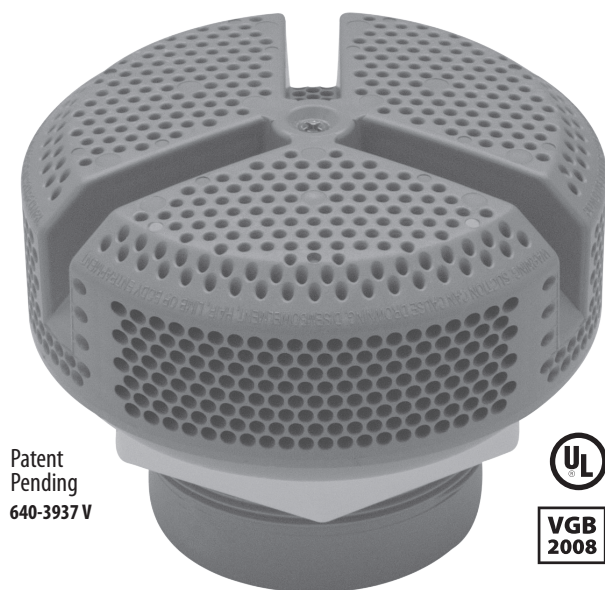

Patent
Pending
640-3937 V



VGB
2008

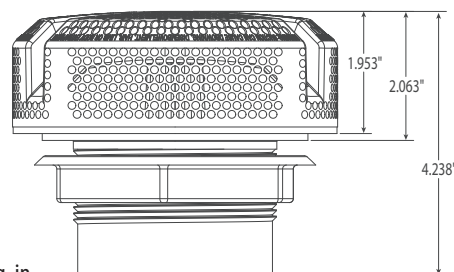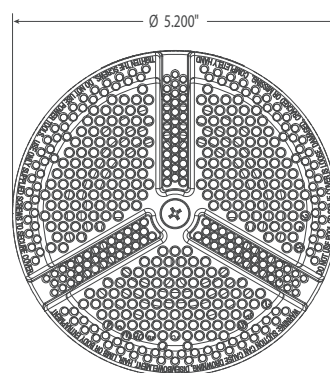

FEATURES:

- Ultra Flo Rating of 264 GPM (portable spas only)
- Available in 2" and 2 ½" S sizes
- 2 ½" can be used with fittings (below)

SPECIFICATIONS:

- Total Open Area: 11.87 sq. in.

5" Ultra Flo Suctions

Part No.	Description	Case Quantity	List (US \$)
640-394x VP	5" Ultra Flo Suction Assembly - 2" S	35	26.39
640-393x VP	5" Ultra Flo Suction Assembly - 2 ½" S	35	26.39

Replace the final x in the part number with the color of your choice (see page 4 for colors)



642-3680



642-3700



642-3610

Non-Vacuum Break Fittings for 2 ½" S Ultra Flo Suctions

Part No.	Description	Case Quantity	List (US \$)
642-3680	2 ½" x 2" S Straight Adapter	80	6.85
642-3700	2 ½" x 2" S 90° Ell Adapter	55	7.60
642-3610	2 ½" S 90° Ell Adapter	70	8.04
642-3730	2" S 90° Threaded Ell Adapter	35	6.85
642-3750	2" Threaded Straight Adapter	50	6.85